


Clips are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place. Edge clips are available in three configurations: two piece clip and tie assembly, a one piece clip and tie combination and an edge clip and tape bar combination. When noted (*), cable ties are outside serrated which can reduce bundle chafing.

Two Piece Edge Clip and Cable Tie Assemblies

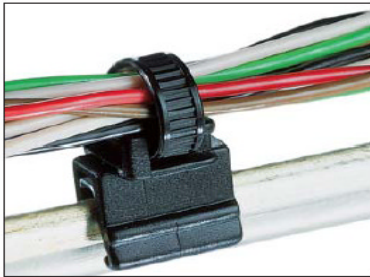

T50ROSEC4A - the cable bundle runs parallel with the edge.

Material Data - Cable Tie	ROHS
Material: Polyamide 6.6 heat stabilized (PA66HS)	
Color: Black	
Operating Temperature: -40F to +221F (-40C to +105C) continuous	
Flammability: UL94 V2	
Material Data - Edge Clip	ROHS
Material: Polyamide 6.6 high impact modified, heat stabilized (PA66HIRHS)	
Color: Black	
Operating Temperature: -40F to +230F (-40C to +110C) continuous	
Flammability: UL94 HB	

EFC Part #	Type	Min. Tensile Strength	Length	Max Ø Bundle	Pkg Qty	Drawing
Panel Thickness .039" - .117" (1-3mm)		lbs. (N)	in. (mm)	in. (mm)		
E46012990001	T30REC4A	30 (135)	5.9" (150)	1.3" (33)	500	
E46012990002*	T50SOSEC4A	50 (225)	5.9" (150)	1.2" (31)	500	
E46012990003	T50REC4A	50 (225)	8" (202)	1.8" (45)	500	
E46012990004*	T50ROSEC4A	50 (225)	7.9" (200)	1.8" (45)	500	
E46012990005	T30REC4B	50 (225)	5.9" (150)	1.3" (33)	500	
E46012990006*	T50S0SEC4B	50 (225)	6.5" (165)	1.2" (31)	500	
E46012990007*	T50ROSEC4B	50 (135)	7.9" (200)	1.8" (45)	500	
E46012990008*	T50SOSEC5A	50 (225)	5.9" (150)	1.2" (31)	500	
E46012990009	T50REC5A	50 (225)	8" (202)	1.8" (45)	500	
E46012990010	T50ROSEC5A	50 (225)	7.9" (200)	1.8" (45)	500	
E46012990011	T50RDHEC5A	50 (225)	8.3" (210)	1.8" (45)	500	
E46012990012	T30REC5B	30 (135)	5.9" (150)	1.3" (33)	500	
E46012990013*	T50SOSEC5B	50 (225)	5.9" (150)	1.2" (31)	500	
E46012990014	T50REC5B	50 (225)	8" (202)	1.8" (45)	500	
E46012990015*	T50ROSEC5B	50 (225)	7.9" (200)	1.8" (45)	500	
E46012990016	T18REC9	18 (80)	3.9" (100)	.75" (19)	500	
E46012990017*	T50SOSEC9SD	50 (225)	5.9" (150)	1.2" (31)	500	
E46012990018	T50ROSEC9	50 (225)	7.9" (200)	1.8" (45)	500	
E46012990019	T18R-EC10	18 (80)	3.9" (100)	.79" (20)	500	
E46012990020*	T50ROSEC10	50 (225)	7.9" (200)	1.8" (45)	500	
E46012990021	T50SOSEC21	50 (225)	5.9" (150)	1.3" (33)	500	
E46012990022	T50ROSEC21	50 (225)	7.9" (200)	1.8" (45)	500	
E46012990023	T50SOSEC22	50 (225)	5.9" (150)	1.3" (33)	500	
E46012990024	T50ROSEC22	50 (225)	7.9" (200)	1.8" (45)	500	

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

For more information, contact EFC International:

St. Louis (Corporate) 800-888-3326 (fax: 314-434-2902)
Chicago 800-727-8466 (fax: 630-539-7070)
Atlanta 800-541-9019 (fax: 770-663-8484)

#ES0039
02/2008

Explore other EFC Engineering Solutions on-line at: www.efc-intl.com