




# Engineering Solutions

## SFS Flex Tool

Perfect for Riv-Float® installation!

### Features & Benefits

- Size Range: M3-M10 and 6-32-3/8-16
- Push to start nose piece to spin on fastener
- Single stage trigger
- Automatic reverse with manual reverse bypass
- Quick change mandrel design
- Light weight tool (4.2 lbs)
- Can be suspended from a balancer
- Socket Head Cap Screw Mandrel
- Available in an in-line version
- Split tool available (remote booster for lighter tool)
- Upgradeable to process monitoring
- 5,000 lbs. (20kN) pulling force at 90 psi
- 7mm (0.276 in.) of available stroke
- 2-3 second cycle time
- All aluminum design for improved durability

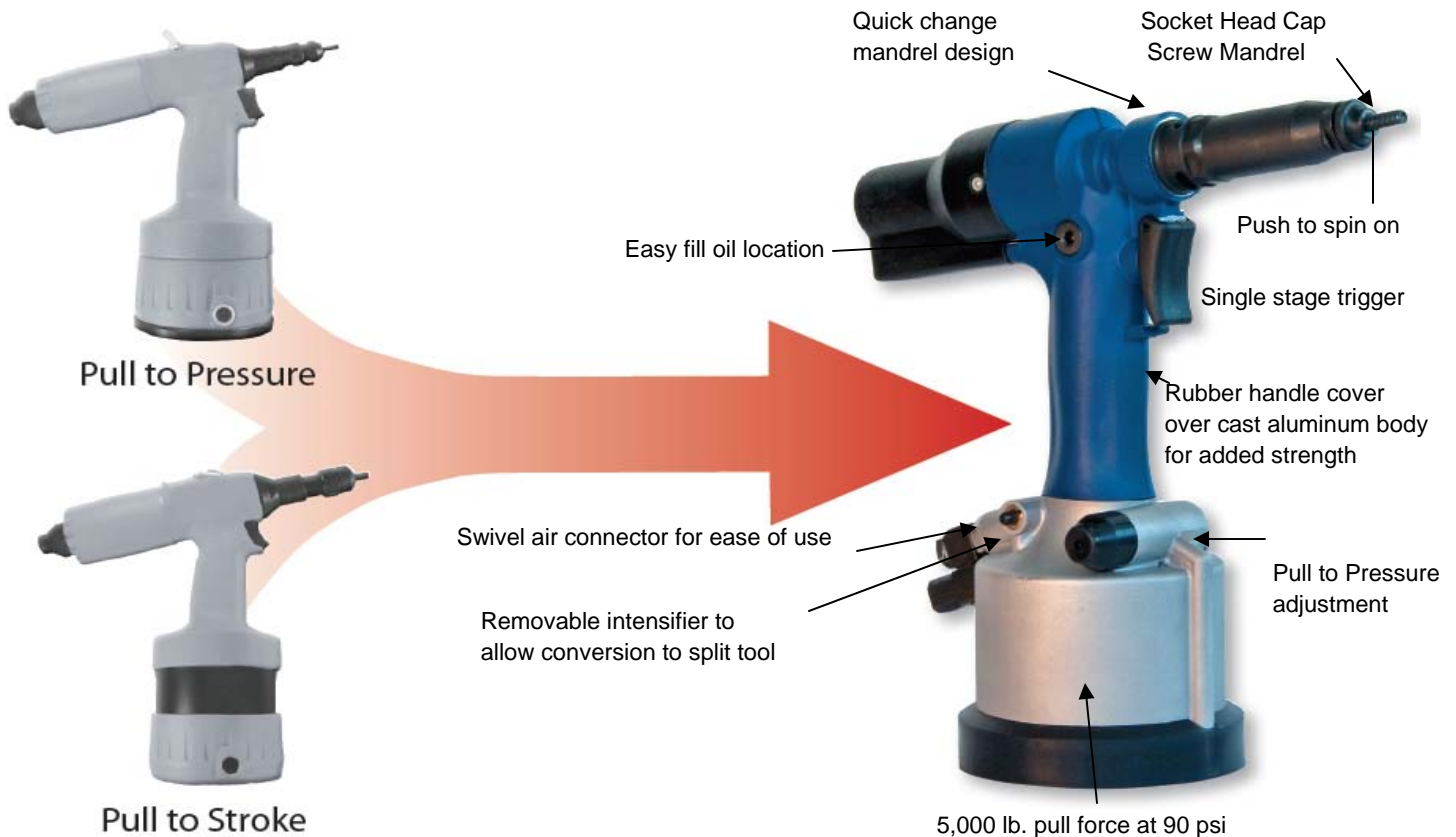

**One tool with Pull to Pressure & Pull to Stroke Capabilities**

**Pull to Pressure: EFC #06X03000435-TL**

**Pull to Stroke: EFC #06X03000436-TL**

Atlanta | St. Louis | Chicago | Toronto

800.888.3326

[www.efc-intl.com](http://www.efc-intl.com)