

PRESSLOC RIBBED COMPRESSION LIMITER

Perfect for Securing Fastening in Plastic!

The PressLoc was developed to enable metal-to-plastic conversion for critical components. It provides secure fastening for plastic components, without over-stressing the plastic while maintaining bolt load.

FEATURES AND BENEFITS

- ▶ High compression strength.
- ▶ Large bearing area – fasten to aluminum.
- ▶ Drop-in assembly. Self-centering.
- ▶ Securely presses into straight, tapered or reverse tapered hole.
- ▶ Accommodates large hole tolerances.
- ▶ Plastic creep promotes spacer retention.
- ▶ Large contact area – eliminates need for washer.
- ▶ Low plastic hoop stress – allows thin wall boss.

PART NO.	BOLT SIZE	Ø ID	Ø OD	Ø PD	L ± 0.08	Ø WD	WT	REC'D HOLE Ø	RATED PROOF LOAD (KN)
11C100107	M6	6.7	9.8	10.3	13.5	15	0.9	10±0.15	15
11C100108	M6	6.7	9.8	10.3	17.5	15	0.9	10±0.15	15
11C100109	M6	7	9.8	10.3	27.5	13	1	10±0.15	15
11C100110	M8	8.9	13	13.7	13.5	18	1.1	13.3±0.2	24
11C100111	M8	8.9	13	13.7	26.8	18	1.1	13.3±0.2	24



- ▶ Special sizes available
- ▶ Captured screw optional

MATERIAL


- ▶ 1050 High Carbon Steel – Heat Treated

AVAILABLE FINISH

- ▶ Zinc/Aluminum Rich Dip/ Spin
- ▶ Hex Chrome Free
- ▶ Salt Spray (ASTM B117) – 480 Hours



SECTION A-A

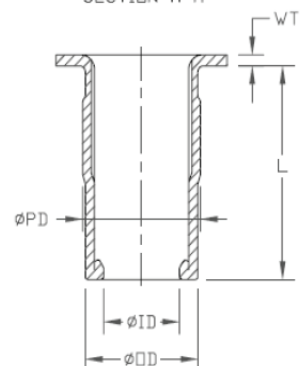



REDEFINING THE WORLD OF DISTRIBUTION

CONNECTIONS

EXPERT
PEOPLE

ENGINEERING

QUALITY

LOCAL
SUPPORT
GLOBAL
PRESENCE

LOGISTICS

EFC Is A Solutions Provider.
Innovation Is The Engine That Fuels Our Dedication To Solving Problems.