



ROTARY DAMPERS 20° PRESSURE ANGLE SERIES

Guaranteed Smooth Controlled Opening & Closing of Mechanisms


The Rotary Dampers' housing is made from ABS, PC or POM and the gear is made from POM. They have a temperature range of 32°F (0°C) to 122°F (50°C) and a flammability rating of 94V-2 (PC) or 94-HB (POM and ABS).

FEATURES AND BENEFITS

- ▶ Guarantee a smooth controlled opening and closing of mechanisms.
- Absorb and slow down motion to decrease vibration, noise and machine component wear.



- Designed to enable mechanisms to operate with a smooth rate of acceleration to provide a feel of quality.
- Slow down left, right or bi-directional rotation.
- ▶ RD20-XX-YYY-ZZ where XX = mounting style code, YYY = torque and ZZ = teeth
- ▶ Applications include Computer Docking Station, CD Player, any front/back panel of PC, Printer, TV, and home appliance.

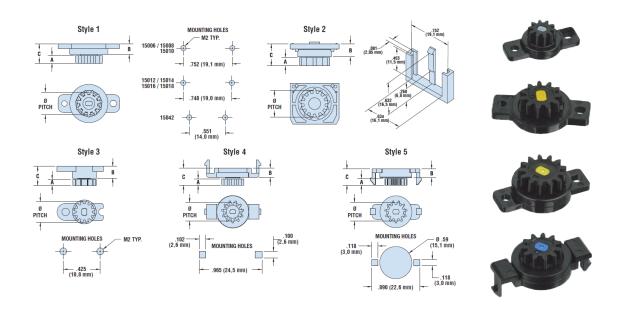



ENGINEERED SOLUTIONS



REDEFINING THE WORLD OF DISTRIBUTION













EFC Is A Solutions Provider.

Innovation Is The Engine That Fuels Our Dedication To Solving Problems.